

MacRay-U1 Overview

MacRay-U1 is a rugged ultrasonic level sensor for precise, non-contact measurement of liquid or solid levels in tanks, silos, and open areas. Using LoRaWAN® connectivity, it transmits real-time data for remote monitoring and threshold-based alerts.

Perfect for applications like water level monitoring, flood detection, smart waste bins, and tank management, MacRay-U1 integrates seamlessly with Macnman LoRaWAN® gateways and platforms for easy data access and automation.

Sensors

Ultrasonic Sensor

Sub 4 Meter

Wireless Technology



Features

High-Precision Ultrasonic Sensing

High Accuracy, Low Interference

IP66-Rated Enclosure (Sensor)

Designed for industrial & outdoor environments

Smaller Blind Zone

Smaller Blind Zone, Stronger Sensing

Supports Macnman Beam Protocol

Direct control, & local device-to-device actions

High Antistatic Performance

Anti-static and Weatherproof Design

LoRaWAN® Class A & C communication

Communication for flexible uplink strategies

Supports periodic, threshold-based, & event-driven uplinks

Strong Resistance

Rugged, Precise, and Reliable

Secure onboarding with pre-flashed DevEUI / AppEUI / AppKey

Compatible with all LoRaWAN® network servers & gateways



Specifications

Measurement	
Ranging Range	3 – 450 cm
Blind Zone Distance	3 cm
Response Time (Sensor)	100 ms
Resolution	0.1°C
Center Frequency	40 kHz ± 1 kHz
Sensing Angle	60°
Protection Rating (Sensor)	IP67

Wireless Transmission	
Technology	LoRaWAN® (v1.0.4), Macnman Beam Protocol
Antenna	Internal high-efficiency antenna
Supported Bands	IN865 / RU864 / EU868 / US915 / AU915 / KR920 / AS923-1/2/3/4
Tx Power	16 dBm @ 868 MHz 20 dBm @ 915 MHz 19 dBm @ 470 MHz
Sensitivity	-137 dBm @ 300 bps
Activation	OTAA / ABP
LoRaWAN® Class	Class A (default), Configurable to Class C via Maya



Led Status	
LED Type	2 Internal Multi-Color LED
Solid Blue	Device is connected with Maya App
Flashing Blue	OTA (Over-the-Air) update in progress
Slow Blinking Green	Attempting to connect to the LoRaWAN® network
Single Red Blink	A confirmed parameter of MacRay is being modified


Configuration	
Configuration	Via Macnman Maya Android App
Maya Fatures	Threshold / Trigger / Sample based alarm triggers
Stored Records	30,000 Records (accessible via Maya)
Remote Configuration	Yes - JSON format Data


Physical Characteristics	
Power Supply	Inbuilt Battery - 12,000 mAh
Operating Temp	-40°C to +80°C
Humidity Range	0% to 100% RH (non-condensing)
Ingress Protection	IP65 standard (IP67 optional variant)
Housing Material	ABS Plastic
Color	Matte Black
Weight	~140g (with 12 Ah battery)
Dimensions	Approx. 96 mm X 96 mm X 23 mm (customizable branding available)
Mounting Options	Wall Mounting - Screw fix type



Certifications	
Regulatory	WPC
Environmental	RoHS compliant

Beam Pattern

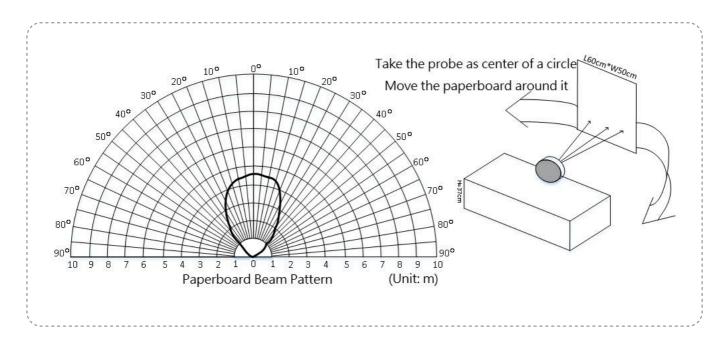

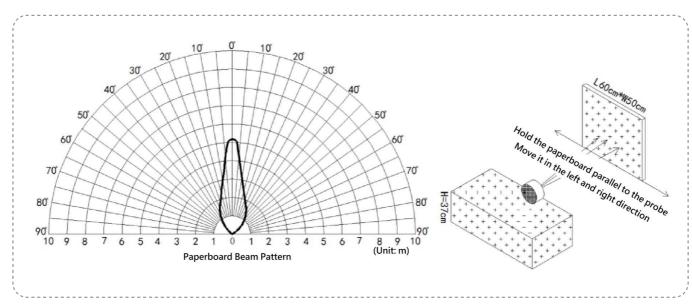

Product Dimension



MacRay - U1 - Standard Version



y to serve you. तुमची सेवा करण्याची संधी दिल्याबद्दल धन्यवाद. మీకు సేవ చేసే అం के अवसर के लिए धन्यवाद भवतः सेवायाः अवसरस्य कृते धन्यवादः तभारी सेवा કરવાની

Say Hello 👋

- www.macnman.com
- @ info@macnman.com
- +91 7972856163
- SHOP-15, 635 1B, Bibwewadi, Pune, Maharashtra 411037

Support Mails

- @ chat@macnman.com
- @ helpdesk@macnman.com
- @ support@macnman.com

This manual and all its contents are the intellectual property of Macriman Technologies Pvt. Ltd. and are protected under Indian copyright laws and applicable international conventions

All trademarks, certifications, and logos mentioned in this document or related products are used with appropriate licensing. These may include, but are not limited to, certifications such as CE, FCC, RoHS, REACH, BQB, WEEE, and others. Ownership of trademarks, logos, and trade names remains with their respective owners. For instance, the Bluetooth® trademark and logo are the property of Bluetooth SIG, Inc. Other trademarks belong to their rightful proprietors.

Given the compact size of the module, the "®" symbol is omitted from Bluetooth-related trademarks in compliance with applicable regulations

Macman Technologies Prt. Ltd. reserves the right to modify the content of this manual to align with advancements in technology. Updated versions may be released without prior notification. Unauthorized modification, reproduction, or use of part or all of this manual without written consent from Macman Technologies Prt. Ltd. is strictly prohibited. Legal action will be taken against widotan accordance with Indian law.