

ParkNode Gen1 Overview



ParkNode Gen 1 is a compact, in-ground LoRaWAN®-enabled geomagnetic parking sensor designed to detect vehicle presence accurately in individual parking spots. It uses advanced geomagnetic sensing to determine real-time occupancy status, with minimal power consumption and long battery life, even in challenging outdoor environments.

Ideal for on-street and off-street smart parking solutions, MacSync-GM1 supports efficient parking management, enforcement, and navigation. It's widely used in smart cities, airports, malls, corporate parks, and gated communities to optimize parking space usage and reduce vehicle idle time

Sensors

Geomagnetic

Microwave Radar (Optional)

Wireless Technology



Features

RS485 (Modbus RTU) Interface

Compatible with energy meters, PLCs, Transmitters

Temperature & humidity measurement

Optional Sensing for Road Condition

Easy Surface Mounting

Quick, non-invasive installation

Smart Platform Integration

Easy onboarding with Parkomate Platform

High Reliability

Accuracy of dual-mode detection is over 99%

Massive 12Ah built-in lithium battery

Up to 10+ years depending on settings

Supports Macnman Beam Protocol

Direct control, & local device-to-device actions

Secure onboarding with pre-flashed DevEUI / AppEUI / AppKey

Optional Onboard Data Buffering

To prevent data loss in case of network downtime

Compatible with all LoRaWAN® network servers & gateways

Specifications

Measurement

Sensing Type	Geomagnetic
Detection Algorithm	Three-axis joint detection algorithm

Wireless Transmission

Technology	LoRaWAN® (v1.0.4), Macnman Beam Protocol
Antenna	Internal high-efficiency antenna
Supported Bands	IN865 / RU864 / EU868 / US915 / AU915 / KR920 / AS923-1/2/3/4
Tx Power	16 dBm @ 868 MHz 20 dBm @ 915 MHz 19 dBm @ 470 MHz
Sensitivity	-137 dBm @ 300 bps
Activation	OTAA / ABP
LoRaWAN® Class	Class A (default), Configurable to Class C via Maya

Led Status (Optional Version)

LED Type	1 Internal Multi-Color LED - Not Visible on surface
Solid Blue	Device is connected with Maya App
Flashing Blue	OTA (Over-the-Air) update in progress
Slow Blinking Green	Attempting to connect to the LoRaWAN® network
Single Red Blink	A confirmed parameter of MacSync is being modified


Configuration(Optional Version)

Configuration	Via Macnman Maya Android App
Maya Fatures	Threshold / Trigger / Sample based alarm triggers
Stored Records	30,000 Records (accessible via Maya) (optional)
Remote Configuration	Yes - JSON format Data

Physical Characteristics

Power Supply	Inbuilt Battery - 12,000 mAh
Operating Temp	-40°C to +80°C
Humidity Range	0% to 100% RH (non-condensing)
Ingress Protection	IP68 standard
Housing Material	ABS Plastic
Color	Matte Black , Matte Yellow
Weight	~960g (with 12Ah battery)
Dimensions	Φ: 202mm, H: 30mm
Installation	Surface-mounted type
Load-bearing	10 tons

Device Dimensions

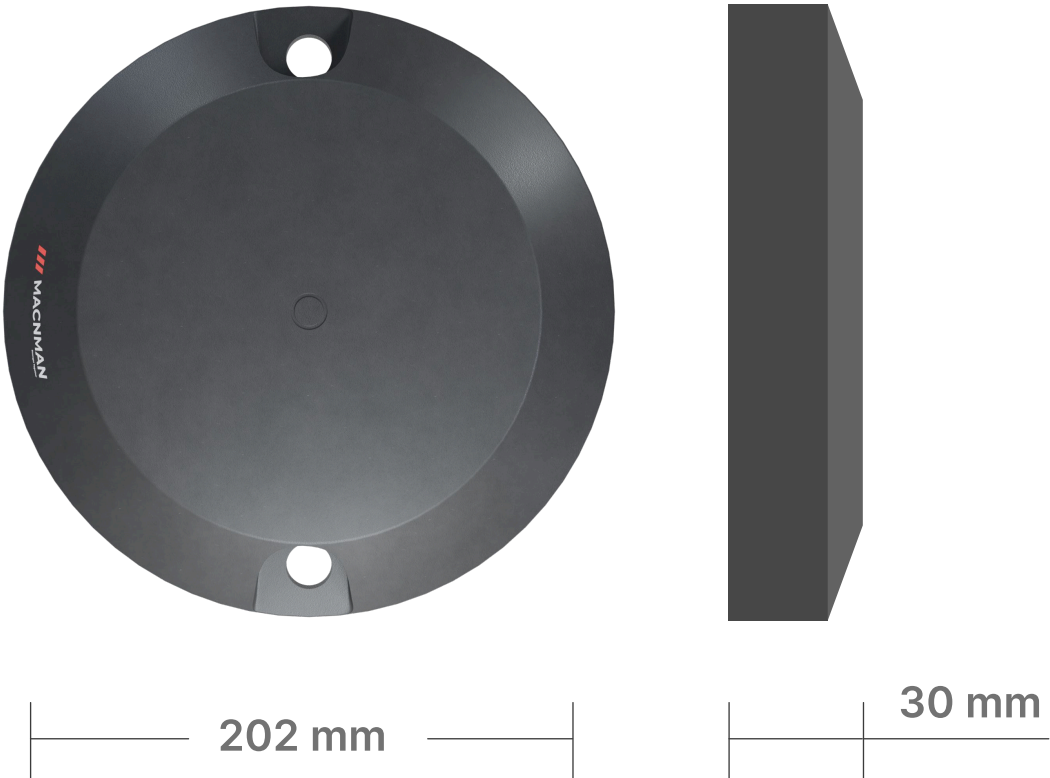

Device Installation



y to serve you. तुमची सेवा करण्याची संधी दिल्याबद्दल धन्यवाद. మీకు సేవ చేసే అ
के अवसर के लिए धन्यवाद भवतः सेवायाः अवसरस्य कृते धन्यवादः તમારી સેવા કરવાની

Say Hello 🙋

- 🌐 www.macnman.com
- ✉ info@macnman.com
- 📞 +91 7972856163
- 📍 SHOP-15, 635 1B, Bibwewadi, Pune,
Maharashtra 411037

Support Mails

- ✉ chat@macnman.com
- ✉ helpdesk@macnman.com
- ✉ support@macnman.com

This manual and all its contents are the intellectual property of Macnman Technologies Pvt. Ltd. and are protected under Indian copyright laws and applicable international conventions.

All trademarks, certifications, and logos mentioned in this document or related products are used with appropriate licensing. These may include, but are not limited to, certifications such as CE, FCC, RoHS, REACH, BQB, WEEE, and others. Ownership of trademarks, logos, and trade names remains with their respective owners. For instance, the Bluetooth® trademark and logo are the property of Bluetooth SIG, Inc. Other trademarks belong to their rightful proprietors.

Given the compact size of the module, the "®" symbol is omitted from Bluetooth-related trademarks in compliance with applicable regulations.

Macnman Technologies Pvt. Ltd. reserves the right to modify the content of this manual to align with advancements in technology. Updated versions may be released without prior notification. Unauthorized modification, reproduction, or use of part or all of this manual without written consent from Macnman Technologies Pvt. Ltd. is strictly prohibited. Legal action will be taken against violators in accordance with Indian law.

By using this manual, you agree to comply with the terms stated herein.